

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
24 February 2005 (24.02.2005)

PCT

(10) International Publication Number
WO 2005/018130 A3

(51) International Patent Classification⁷: H04L 7/00 TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/IL.2004/000739 (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(22) International Filing Date: 11 August 2004 (11.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/494,575 13 August 2003 (13.08.2003) US

(71) Applicant and
(72) Inventor: RAPHAELI, Dan [IL/IL]; Halamed Hei 19, 44394 Kfar Saba (IL).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*


Published:

— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:
16 June 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ANALOG SIGNALS SAMPLER PROVIDING DIGITAL REPRESENTATION THEREOF

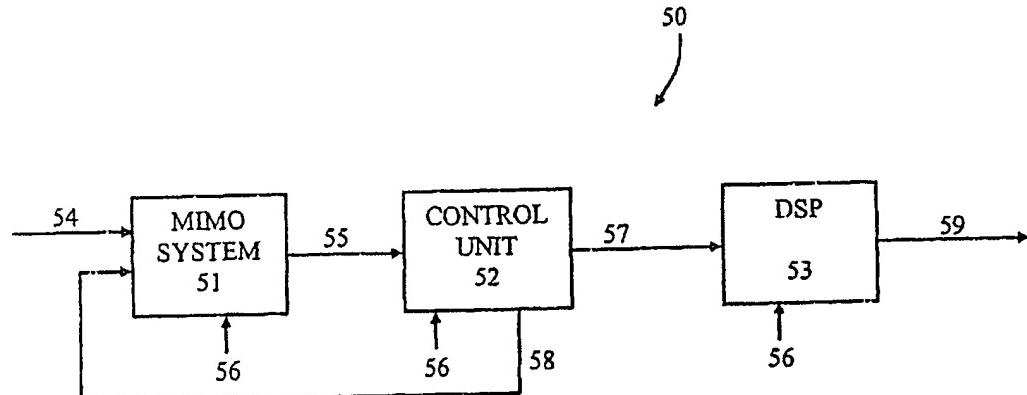

WO 2005/018130 A3

(57) Abstract: A method and a corresponding system for sampling at least one analog signal (54) and providing digital representation thereof (59). Disclosed an analog circuit (51) featuring high bandwidth, high gain, and low current consumption, wherein that analog circuit is implemented by low accuracy components. The analog circuit is integrated with a control unit (52). The control unit is keeping error outputs of the system at a minimal value so that the total effect of the control unit is canceling the effect of the input signals. By knowing the effect of the control unit, the at least one analog input signals (54) can be approximated. The control unit is using discrete value signals (58). Digital representation of these discrete value signals (57) is feed to a DSP that is reconstructing the input signal by knowing the effect of the control unit and the model of the sampler.

BEST AVAILABLE COPY